

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS

Model : **V 60 LS 5 PULSE**

Manufacturer :



PERFORMANCE

5 stainless steel heated levels including 4 presentation shelves.
Individual LED lighting
Regulated and ventilated shelves thanks to 'FORCED AIR' technology to keep products warm and packed at legal temperature
Our hot display cases are approved and guarantee that foodstuffs are kept at 145°F temperature at heart
The unit is maintained at the legal temperature by a curtain of hot air in the front.
Regulation by thermostat (front display facing customers).
Quartz lighting and tempered glass protection.

ERGONOMIC

Side windows for panoramic view and tempered glass retaining stop on shelves
4 casters including 2 with brakes.

OPTIONS

- Front glass door for the protection of the enclosure warm against drafts

- Rear glass door for a load of food ease from the work area



POWER SUPPLY

- Standard: 220V Single Phase
- 20 Amps
- 4200 Watts

SAFETY

Tempered glass protectionm.

HEATED SELF-SERVICE DISPLAY


SPECIFICATIONS

Model : **V 60 LS 5 PULSE**


Manufacturer :



SIDE VIEW

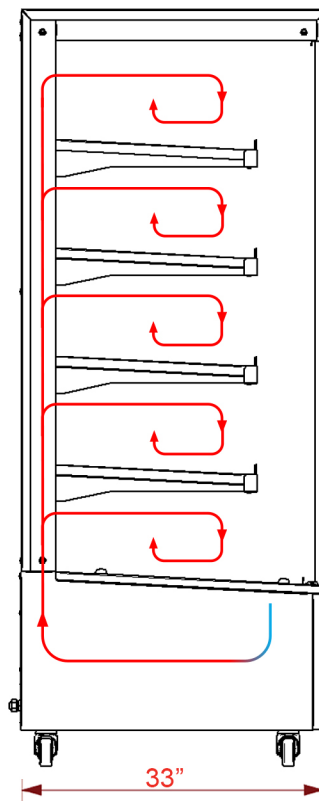

FRONT VIEW

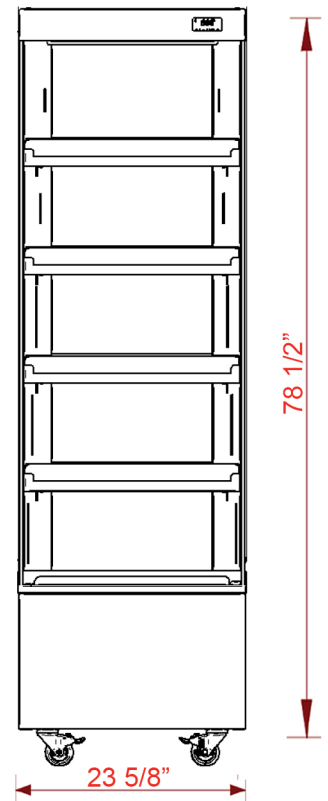

| References | Width | Depth | Height | Voltage | Plug | Power |
|-----------------|---------|-------|---------|--------------------|------|--------|
| V 60 LS 5 PULSE | 23 5/8" | 33" | 78 1/2" | 220 V Single Phase | 20 A | 4.2 Kw |